


TECHNICAL SPECIFICATION INFORMATION

24-inch Rexus II Manhole Cover and Frame



Manhole cover and frame shall be called REXUS II or approved equal. Cover and frame shall be manufactured from Ductile Iron. In a foundry certified under the requirements of ISO 1083. Covers shall be hinged and incorporate a 90° blocking system to prevent accidental closure and a 110° opening socket-joint. Covers shall be one-man operable using standard tools. Covers shall incorporate a spring bar locking system, which automatically activates when the cover is closed. Additional security features shall include a device to prevent the cover from being completely removed from the frame. This device shall be capable of being deactivated if required. Frames shall be circular and shall incorporate a seating ring and shall have a 24" clear opening. Frame depth shall not exceed 4"; frame flanges shall incorporate bedding slots and bolt holes. All components shall be black coated and manufactured in ISO 9000 certified manufacturing plants. Cover weight 59.4 lbs. Frame weight 46.64 lbs. Total weight 106.04 lbs.

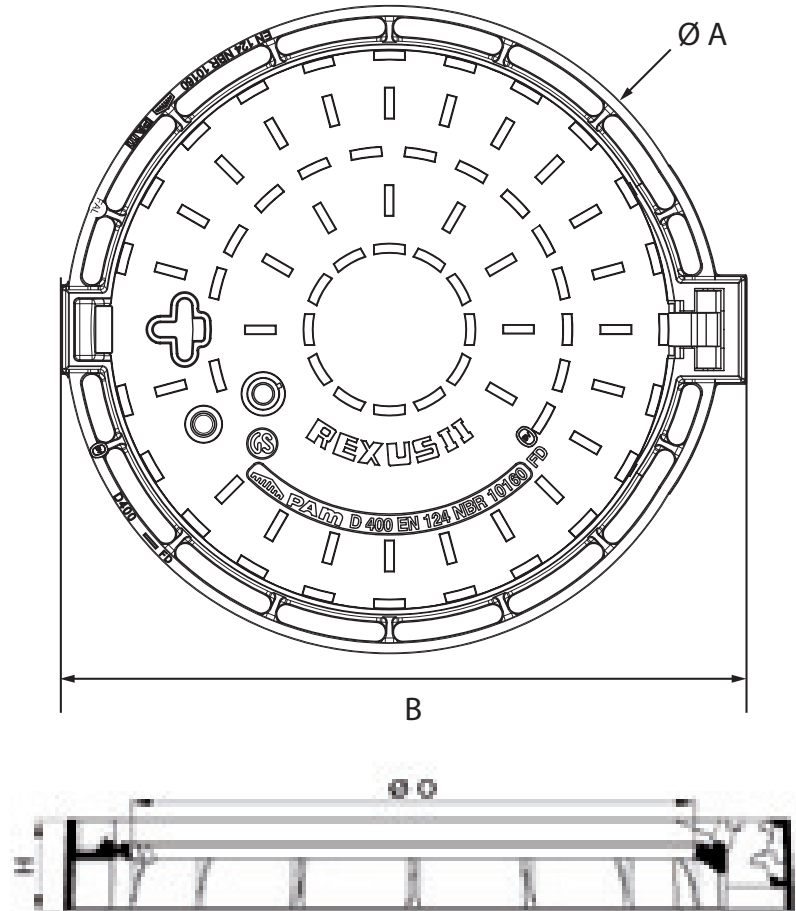

WEIGHT (Lbs/Pounds)			DIMENSIONS (frame)			
Cover	Frame	Total	A (in)	B (in)	O (in)	H (in)
59.4	46.64	106.04	30	32	24	4

Available from



Jim Cox Sales, Inc.
INNOVATIVE SOLUTIONS THAT WORK

P.O. Box 2380 • Keller, TX 76244-2380
Office: 817-636-2092 • Fax: 817-636-2382

Toll-free: 800-838-7377

www.jimcoxsales.com