

# Strong-Seal® Systems

# STRONG-PLUG®

A hydraulic cement material specially formulated so that when mixed with water it will stop infiltrating water and provide high early strength for stopping leaks and repairing cracks in concrete, brick or other masonry constructed structures.

## APPLICATION

### WET

- Clean surface.
- Chisel out leak 1" wide and 1" deep.
- Add water and mix to a dough-like consistency.
- Press into crack and hold in place with hand or trowel until product sets.


### DRY

- Clean surface.
- Sprinkle dry powder onto leak or hold in place with hand or trowel until wet.
- Allow leaking water to set dry material.
- Repeat procedure until leak stops.



## STRENGTH

TIME	COMPRESSION	BOND
1 Hr.	>1000 PSI	>400 PSI
24 Hrs.	>2500 PSI	>1000 PSI

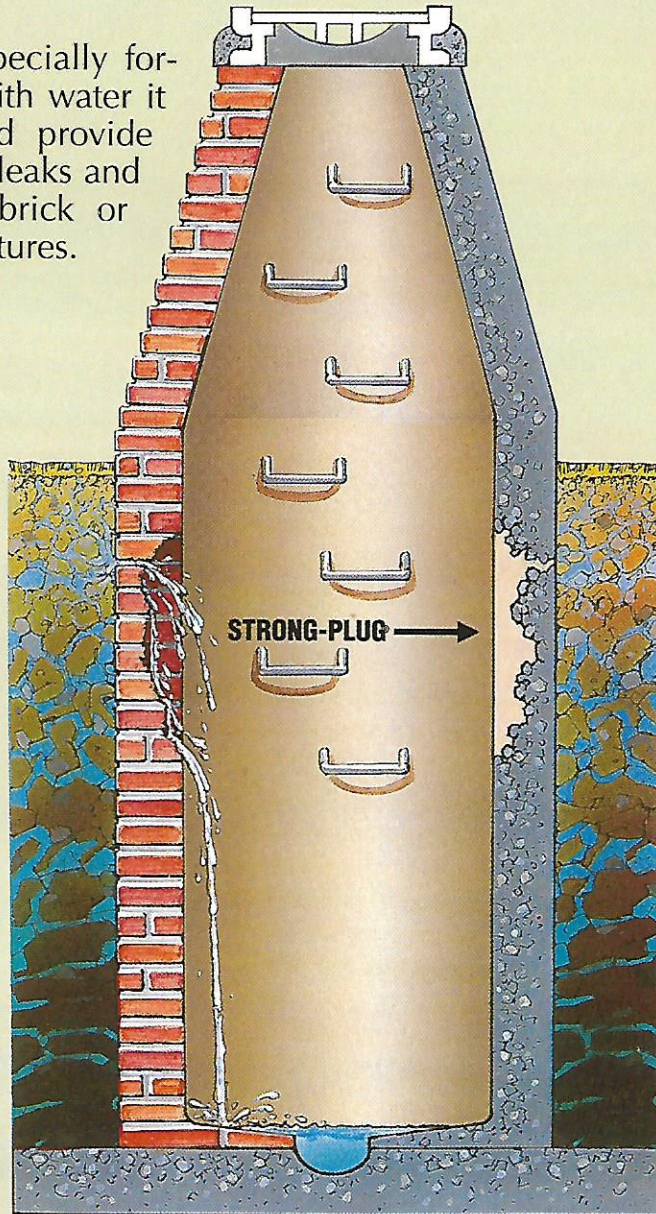

## SPECIFICATIONS

### FEATURES

Fast setting, high, early strength, acid resistant, good bond strength, 0% shrinkage at 90% relative humidity ... easy application.

### SET TIME

<1 minute

### PACKAGING

5-gallon pails  
50 lbs. per pail


### YIELD

1/2 cu. ft. per pail/bag

### CAUTION

All persons working with Strong-Plug® should wear dust mask, eye protection and gloves.

FOR MORE INFORMATION CONTACT



The Strong Company, Inc.

4505 Emmett Sanders Road • Pine Bluff, AR 71601

(870) 535-7617 • 800-982-8009

Fax (870) 850-6933

Website: [www.strongseal.com](http://www.strongseal.com)

Email: [info@strongseal.com](mailto:info@strongseal.com)

THE FOREGOING IS SUBJECT TO THE STRONG COMPANY'S, INC. STANDARD LIMITED WARRANTY FOR THE DESCRIBED PRODUCTS.