

Strong-Seal® Systems

QSR PATCHING MATERIAL

A fast setting, high early strength, acid resistant, hand mixed and hand applied product for filling voids and repairing inverts in concrete, brick or other masonry constructed structures.

FIBER REINFORCED!


APPLICATION

- Wash surface clean.
- Remove loose brick, mortar and debris.
- Mix in small quantities. No more than can be placed within 10 minutes.
- Mix with water to a dough-like consistency.
- When filling voids, hold in place with hand or trowel until material will remain in place.
- Allow QSR to set for a minimum of 1 hour before applying Strong-Seal® Liner.
- When repairing inverts, trowel to contour of invert and onto bench a minimum of 1/2" thick.



COMPRESSIVE STRENGTH

1 Hour	>1800 PSI
24 Hours	>2600 PSI
28 Days	>3000 PSI

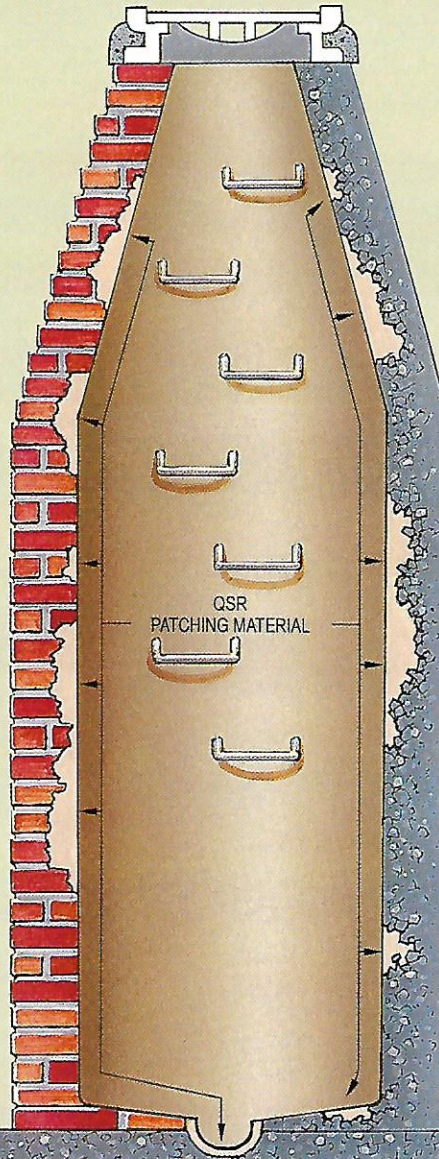

BOND (28 Days)
>2000 PSI

SHRINKAGE
0% @ 90% relative humidity

MIX RATIO
(by volume)
1 part water-3 parts QSR

PLACEMENT TIME
5-10 minutes


FLOW RELEASE
15-30 minutes after placement

PACKAGING
5-gallon pails
40 lbs. per pail

YIELD
.6 cu. ft. per pail

CAUTION
All persons working with QSR should wear dust mask, eye protection and gloves.

FOR MORE INFORMATION CONTACT



The Strong Company, Inc.

4505 Emmett Sanders Road • Pine Bluff, AR 71601

(870) 535-7617 • 800-982-8009

Fax (870) 850-6933

Website: www.strongseal.com

Email: info@strongseal.com

THE FOREGOING IS SUBJECT TO THE STRONG COMPANY'S, INC. STANDARD LIMITED WARRANTY FOR THE DESCRIBED PRODUCTS.